GT122

Enrichment Analysis of Volatile Components from Hairbrush — Sampling Comparisons Between MonoTrap and Sampling Tube

GL Sciences Inc.

Using MonoTrap RGC18 TD and Sampling tube (TenaxTA 150 g) were used as sampling media to compare. Following the analysis condition, it found sampling tube performed better sensitivity for low boiling point components, such as Toluene and Xylene. On the other hand, MonoTrap performed better sensitivity for hydrocarbons, such as Hexadecane and the medium to high-boiling components (Methylbenzothiazole and Phenanthrene). Especially when placed on the hairbrush, the sensitivity performed higher.

When using sampling tube, it is possible to sampling the entire amount of volatilized compounds in Tedlar Bag. Therefore, it could perform a good sensitivity for easily volatilized compounds.

When using MonoTrap, it can be sampling as a position close to the sample, therefore it is able to improve the sensitivities for difficult-to-analyze compounds.

Sampling Preparation

<Sampling with MonoTrap>

Hairbrush

Sampling

MonoTrap RGC18 TD

HandyTD / GC/MS

Place RGC18 (i)* on the hairbrush and put into Tedlar bag.

Place another RGC18 (ii)* at a distance from the hair brush.the hair brush is placed in the hair brush and the hair brush is removed from the hair brush and the hair is removed from the hair brush and


the hair is removed from the hair brush.

Remove air from the pump

Add 1 L


Collect headspace gas overnight at room temperature





* RGC18 (i) is in contact with the hairbrushes RGC18 (ii) is not in contact with hairbrushes


<Sampling with sampling tube>



Place a hairbrush in a tedrag bag Remove air from the pump Add 1 L

Allow to stand at room temperature overnight to volatilize the volatile components
Connect the collection tube to the sampling pump
Connect Tedra Bags behind Collection Tubes
Collect 1 L (100 mL/min) with sampling pumps





※ Volatile constituents in Tedra bags sampled
Be aspirated by pumps and collected in the TenaxTA

System Requirements

GC/MS Conditions

System : Thermal Desorption-GC/MS

(HandyTD TD265)

Column : InertCap Pure-WAX

 $(0.25 \text{ mm I.D.} \times 60 \text{ m, df} = 0.5 \mu\text{m})$

Col. Cat. No. : 1010-68164

Col. Temp. : 40 °C(5 min) - 5 °C/min - 250 °C Carrier Gas : He, 1 mL/min (constant flow)

GC Inlet : 250 °C Split 10:1 Detection : MS Scan (*m/z* 30-350)

HandyTD Conditions

Desorb Temp. : Room temperature(0.1 min)


- 45 °C/sec- 250 °C(5 min) ⇒MonoTrap

Pre Desorb Press. : Room temperature(1 min)

- 45 °C/sec- 270 °C(5 min) ⇒Tenax TA


: 140 kPa

Comparison of Operating Blanks

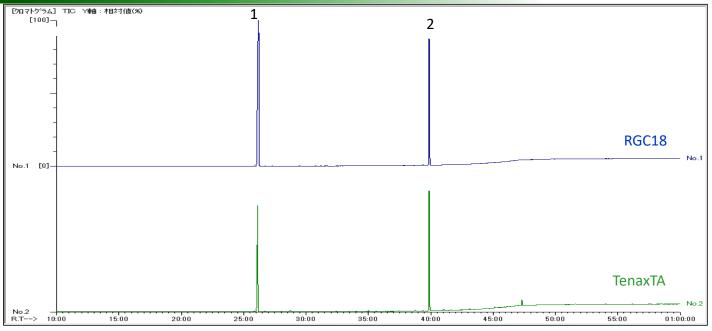


^{* 1,} Dimethylacetamide; 2, Phenol, ingredients from tedra bags.

Comparison of Analysis Result

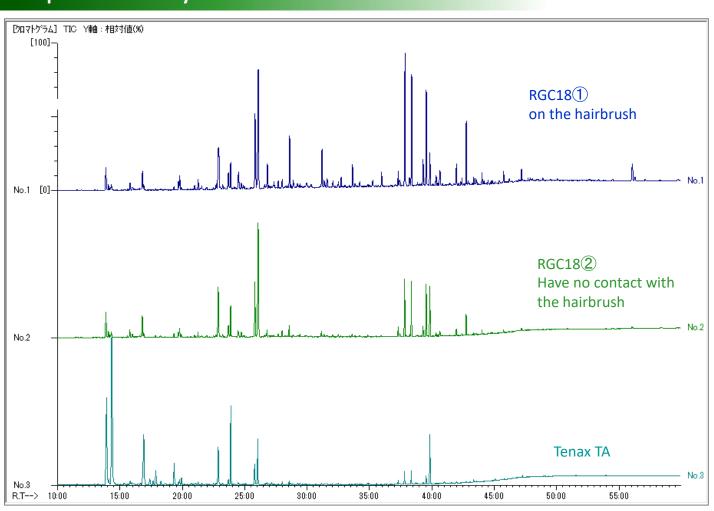

Analytical results (enlarged) of RGC18 (a) and TenaxTA.

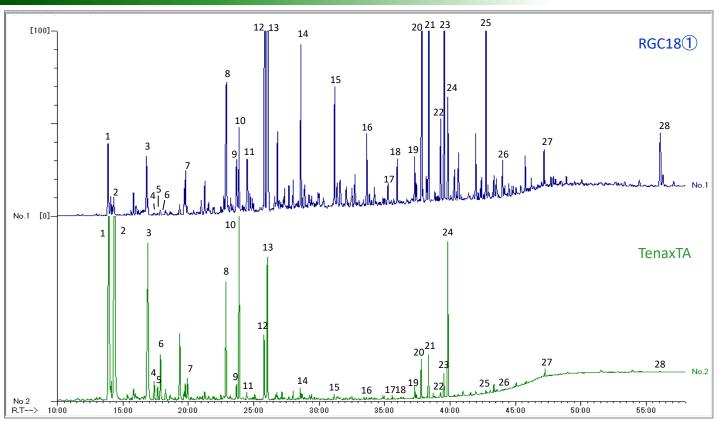

- 1. Pinene
- 2. Toluene
- 3. Pinene
- 4. Ethylbenzene
- 5. Xylene
- 6. Xylene
- 7. Xylene
- 8.Cyclohexanone
- 9. Dimethy formamide
- 10. Methylstyrene
- 11. Acetonyldimethylcarbinol
- 12. Butoxyethanol
- 13. Dimethylacetamide*
- 14. Pentadecane
- 15. Hexadecane

- No qualitative tests have been performed on standard samples. Library search results.
- 16. Heptadecane
- 17. Teramethyl Hexadecane
- 18. Octadecane
- 19. Benzyl Alcohol
- 20. Propanoic acid, 2-methyl-, 1-(1,1-dimethylethyl)
 - -2-methyl-1,3-propanediyl ester
- 21. Butylated Hydroxytoluene
- 22. Methylbenzothiazole
- 23. Benzothiazole
- 24. Phenol*
- 25. Acetone anil
- 26. Caprolactam
- 27. Fluorene
- 28. Phenanthrene
- * This is an ingredient derived from a tedra bag.

GL Sciences disclaims any and all responsibility for any injury or damage which may be caused by this data directly or indirectly. We reserve the right to amend this information or data at any time and without any prior announcement.

GL Sciences, Inc. Japan

22-1 Nishishinjuku 6-Chome Shinjuku-ku, Tokyo,

163-1130, Japan

Phone: +81-3-5323-6620

+81-3-5323-6621 Email: world@gls.co.jp Web: www.glsciences.com

International Distributors

Visit our Website at:

https://www.glsciences.com/company/distributor.html

GL Sciences B.V.

5652 AS Eindhoven

Phone: +31 (0)40 254 95 31

Email: info@glsciences.eu

Web: www.glsciences.eu

The Netherlands

De Sleutel 9

GL Sciences (ShangHai) Ltd.

Tower B, Room 2003, Far East International Plaza, NO,317 Xianxia Road,

Changning District.

Shanghai, China P.C. 200032 Phone: +86 (0)21-6278-2272 Email: contact@glsciences.com.cn Web: www.glsciences.com.cn

GL Sciences, Inc. USA

4733 Torrance Blvd. Suite 255 Torrance, CA 90503

Phone: 310-265-4424 Fax: 310-265-4425

Email: info@glsciencesinc.com www.glsciencesinc.com

